MPGX TYPE

Polish Mill V type MPGX

Provides good bottom finishing and can also perform standing wall finishing. Multi-function end mill

A cutting tool with multi-flute specifications to speed up finishing

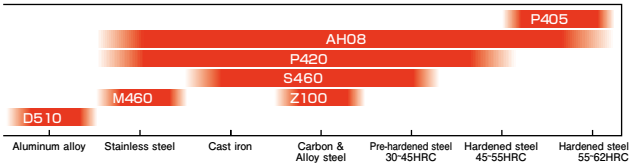

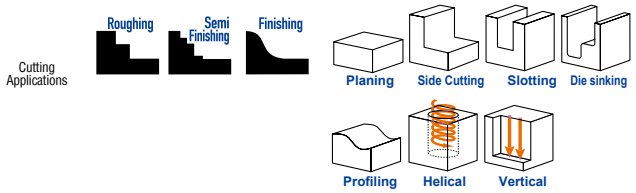

Features

- Ideal cutter for applications finishing structural parts of bottom, side, etc.
- Multi-flute specifications enable higher feed rates for more efficient finishing.
- Vertical machining in which cutting feed is in the direction of the machine's main axis can also be performed.
- Comprehensive lineup of insert materials enables machining of a wide range of materials from carbon steel to hardened steel, as well as aluminum,etc.
- For small machines, use in combination with the modular mill arbor BT30 creates a high-rigidity system and improves machining stability.
- Use in combination with a carbide shank improves machining accuracy when machining with long overhangs.
- In addition to improving durability by using special steel in the cutter body, a PVD coating is applied to the modular type and bore type holder to improve abrasion resistance.

Construction — This insert has 3 cutting edges.

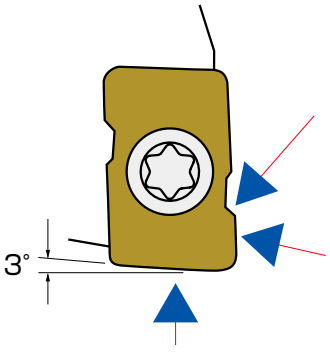

Cutting edge for reciprocating machining

Used as the cutting edge when performing reciprocating finishing vertical machining.



Peripheral cutting edge

Used as the peripheral cutting edge when performing side machining.

Face cutting edge

Used when bottom finishing.

Insert with minor cutting edge

MP*GX* 0603 *R*L - 0.5
MP*GX* 0603 *R*L - 1.5

minor cutting edge enables feed rate to be increased.

Insert without minor cutting edge

MP*GX*0603 *R*L

For bottom machining, suitable for long overhang (L/D= 5 or more) machining or for handling low rigidity in main axis direction.

For vertical machining, inserts without minor cutting edge are recommended.

Straight Shank Type

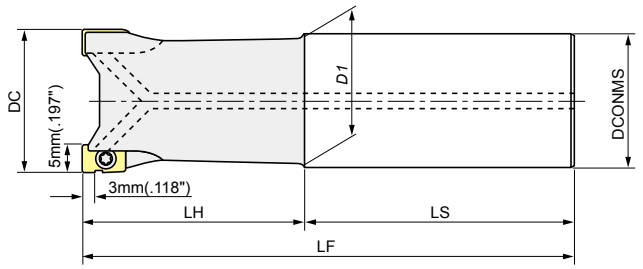

Metric *MPGX*

	Item code		No.of flute	Size (mm)						Inserts
				DC	LF	DCONMS	*D1*	LH	LS	
Shank type	*MPGX 2016R-2*		2	**16**	100	16	14.5	30	70	
	MPGX 2020R-3		3	**20**	110	20	18	30	80	*MPGX0603 RL*
	MPGX 2025R-4		4	**25**	120	25	23	40	80	
	MPGX 2030R-4		4	**30**	150	32	28	50	100	
	MPGX 2032R-5		5	**32**	150	32	30	50	100	*MPGX0603 RL*
	MPGX 2035R-5		5	**35**	150	32	31	50	100	
	MPGX 2040R-6		6	**40**	170	32	31	50	120	

Modular Type

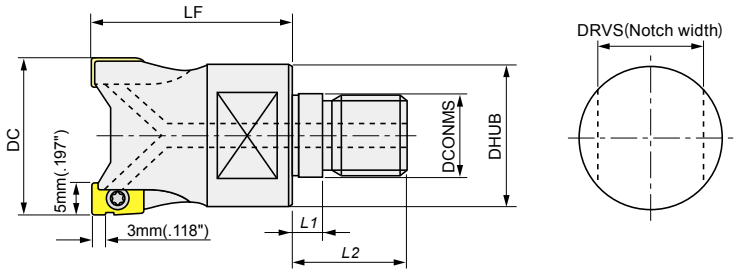

Metric *MPGX*

	Item code		No.of flute	Size (mm)								Inserts
				DC	LF	DCONMS	THSZMS	DHUB	*L1*	*L2*	DRVS	
Modular	*MPGX 2016R-2*		2	**16**	25	8.5	M8	12.8	5.5	17	10	
	MPGX 2018R-2		2	**18**	25	8.5	M8	14.5	5.5	17	10	
	MPGX 2020R-2		2	**20**	30	10.5	M10	17.8	5.5	19	15	
	MPGX 2020R-3		3	**20**	30	10.5	M10	17.8	5.5	19	15	
	MPGX 2022R-3		3	**22**	30	10.5	M10	17.8	5.5	19	15	*MPGX 0603 RL*
	MPGX 2025R-4		4	**25**	35	12.5	M12	20.8	5.5	22	17	
	MPGX 2028R-4		4	**28**	35	12.5	M12	23	5.5	22	17	*MPGX 0603 RL*
	MPGX 2030R-4		4	**30**	40	17	M16	28.8	6	23	22	
	MPGX 2032R-3		3	**32**	40	17	M16	28.8	6	23	22	
	MPGX 2032R-5		5	**32**	40	17	M16	28.8	6	23	22	
	MPGX 2035R-5		5	**35**	40	17	M16	28.8	6	23	22	
	MPGX 2040R-6		6	**40**	40	17	M16	28.8	6	23	22	

Bore Type

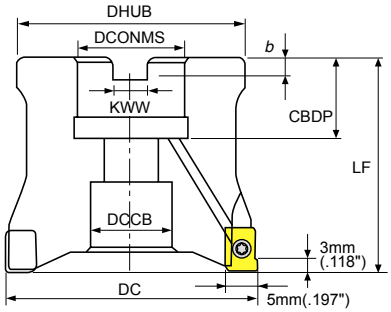

Metric *MPGX*

Item code			No.of flute	Size (mm)								Inserts
				DC	DHUB	LF	CBDP	KWW	*b*	DCONMS	DCCB	
Inside diameter inch size	*MPGX2050R-7*		7	50	47	50	19	8.4	5	22.225	17	*MPGX 0603 RL*
	MPGX2063R-8		8	63	60	50	19	8.4	5	22.225	17	
Inside diameter mm size	*MPGX2050RM-7*		7	50	47	50	20	10.4	6.3	22	17	*MPGX 0603 RL*
	MPGX2063RM-8		8	63	60	50	20	10.4	6.3	22	17	

Inserts





P	Carbon steels	■	■		■	■	■			■:General cutting, First recommended ■:General cutting, Second recommended
M	SUS, etc.	■	■	■			■			
K	FC・FCD Cast irons	■	■		■		■			
N	Aluminum alloys								■	
S	Titanium alloys	■	■				■			
H	Hardened steels	■	■				■			

Item code	Tolerance class	P Coating			S Coating	Coated Cermet	TH Coating		DLC Coating	Size (mm)					Shape
		P405	P420	M460	S460	Z100	TH08		D510	W1	BS	S	LE	RE	
MPGX 060302RL	H					★				6.35	–	3.18	3	0.2	1
MPGX 060302RL-0.5						★				6.35	0.5	3.18	3	0.2	2
MPGX 060304RL		★				●	●			6.35	–	3.18	3	0.4	1
MPGX 060304RL-0.5		★				★	★			6.35	0.5	3.18	3	0.4	2
MPGX 060304RL									★	6.35	–	3.18	3	0.4	1
MPGX 060308RL		★	●			●	●			6.35	–	3.18	3	0.8	
MPGX 060308RL-1.5		★	★			★	★			6.35	1.5	3.18	3	0.8	2,4
MPGX 060308RL									★	6.35	–	3.18	3	0.8	1,3
MPGX 060320RL		★				★	★			6.35	–	3.18	3	2	
MPGX 060308RL	N		★	★	★					6.35	–	3.18	3	0.8	
MPGX 060320RL			★	★	★					6.35	–	3.18	3	2	

Recommended Cutting Conditions

Standard cutting conditions for bottom finishing

Work material	Recommended grade	Tool dia. DC	φ16mm or 5/8" (2 flutes)					φ20mm or 3/4" (3 flutes)					φ25mm or 1.0" (4 flutes)				
		Overhang	<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		Modular carbide shank		
			General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC
Mild Steel (200HB or less)	Z100 TH08 P420 S460	n (min-1)	2,990	5,980	3,990	2,990	2,590	2,390	4,780	3,190	2,390	2,080	1,920	3,830	2,550	1,920	1,660
		Vc (m/min)	150	300	200	150	130	150	300	200	150	130	150	300	200	150	130
		Vf (mm/min)	600	1,800	1,200	720	520	720	2,160	1,440	870	630	770	2,300	1,530	930	670
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Carbon Steel Alloy Steel (30HRC or less)	Z100 TH08 P420 S460	n (min-1)	2,990	4,980	3,590	2,590	2,000	2,390	3,990	2,870	2,080	1,600	1,920	3,190	2,300	1,660	1,280
		Vc (m/min)	150	250	180	130	100	150	250	180	130	100	150	250	180	130	100
		Vf (mm/min)	600	1,500	1,080	630	400	720	1,800	1,300	750	480	770	1,920	1,380	800	520
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Carbon Steel Alloy Steel (30~45HRC)	ATH08M P420 S460	n (min-1)	2,590	3,990	3,190	2,590	1,800	2,080	3,190	2,550	2,080	1,440	1,660	2,550	2,040	1,660	1,150
		Vc (m/min)	130	200	160	130	90	130	200	160	130	90	130	200	160	130	90
		Vf (mm/min)	520	960	770	520	360	630	1,150	920	630	440	670	1,230	980	670	460
		fz (mm/t)	0.1	0.12	0.12	0.1	0.1	0.1	0.12	0.12	0.1	0.1	0.1	0.12	0.12	0.1	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Stainless Steel	P420 M460 TH08	n (min-1)	2,990	4,980	3,590	2,590	2,000	2,390	3,990	2,870	2,080	1,600	1,920	3,190	2,300	1,660	1,280
		Vc (m/min)	150	250	180	130	100	150	250	180	130	100	150	250	180	130	100
		Vf (mm/min)	600	1,500	1,080	630	400	720	1,800	1,300	750	480	770	1,920	1,380	800	520
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Cast iron	TH08 P420 S460	n (min-1)	2,990	4,980	3,990	2,990	2,590	2,390	3,990	3,190	2,390	2,080	1,920	3,190	2,550	1,920	1,660
		Vc (m/min)	150	250	200	150	130	150	250	200	150	130	150	250	200	150	130
		Vf (mm/min)	600	2,000	1,600	900	520	720	2,400	1,920	1,080	630	770	2,560	2,040	1,160	670
		fz (mm/t)	0.1	0.2	0.2	0.15	0.1	0.1	0.2	0.2	0.15	0.1	0.1	0.2	0.2	0.15	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Aluminum alloy	D510	n (min-1)	11,950	23,890	15,930	11,950	11,950	9,560	19,110	12,740	9,560	9,560	7,650	15,290	10,200	7,650	7,650
		Vc (m/min)	600	1,200	800	600	600	600	1,200	800	600	600	600	1,200	800	600	600
		Vf (mm/min)	2,390	7,170	4,780	2,870	2,390	2,870	8,600	5,740	3,450	2,870	3,060	9,180	6,120	3,680	3,060
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Titanium alloy Ti-6Al-4V (wet condition)	TH08 P420	n (min-1)	600	1,200	1,000	600	600	480	960	800	480	480	390	770	640	390	390
		Vc (m/min)	30	60	50	30	30	30	60	50	30	30	30	60	50	30	30
		Vf (mm/min)	120	360	300	120	120	150	440	360	150	150	160	470	390	160	160
		fz (mm/t)	0.1	0.15	0.15	0.1	0.1	0.1	0.15	0.15	0.1	0.1	0.1	0.15	0.15	0.1	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Hardened Steel 45~55HRC	P405 TH08 P420	n (min-1)	1,600	2,390	2,000	1,600	1,600	1,280	1,920	1,600	1,280	1,280	1,020	1,530	1,280	1,020	1,020
		Vc (m/min)	80	120	100	80	80	80	120	100	80	80	80	120	100	80	80
		Vf (mm/min)	320	480	400	320	320	390	580	480	390	390	410	620	520	410	410
		fz (mm/t)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5
Hardened Steel 55~62HRC	P405 TH08 P420	n (min-1)	1,000	2,000	1,400	1,000	1,000	800	1,600	1,120	800	800	640	1,280	900	640	640
		Vc (m/min)	50	100	70	50	50	50	100	70	50	50	50	100	70	50	50
		Vf (mm/min)	100	280	200	100	100	120	340	240	120	120	130	360	260	130	130
		fz (mm/t)	0.05	0.07	0.07	0.05	0.05	0.05	0.07	0.07	0.05	0.05	0.05	0.07	0.07	0.05	0.05
		ap (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		ae (mm)	8~16	8~16	8~16	8~16	8	10~20	10~20	10~20	10~20	10	12.5~25	12.5~25	12.5~25	12.5~25	12.5



ϕ32mm or 1.25" (5 flutes)					ϕ40mm or 1.5" (6 flutes)					ϕ50mm or 2.0" (7 flutes)					ϕ63mm or 2.5" (8 flutes)					Work material
<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		3DC-5DC	5DC-7DC	>7DC	<3DC		3DC-5DC	5DC-7DC	>7DC	
General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting				General purpose	High-speed cutting				
1,500	2,990	2,000	1,500	1,300	1,200	2,390	1,600	1,200	1,040	960	1,600	1,280	960	830	760	1,270	1,020	760	660	Mild Steel (200HB or less)
150	300	200	150	130	150	300	200	150	130	150	250	200	150	130	150	250	200	150	130	
750	2,250	1,500	900	650	720	2,160	1,160	720	630	680	1,680	1,350	810	590	610	1,530	1,230	730	530	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.12	0.1	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
1,500	2,490	1,800	1,300	1,000	1,200	2,000	1,440	1,040	800	960	1,470	1,150	830	640	760	1,170	910	660	510	Carbon Steel Alloy Steel (30HRC or less)
150	250	180	130	100	150	250	180	130	100	150	230	180	130	100	150	230	180	130	100	
750	1,870	1,350	780	500	720	1,800	1,040	630	480	680	1,550	1,210	700	450	610	1,410	1,100	640	410	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.12	0.1	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
1,300	2,000	1,600	1,300	900	1,040	1,600	1,280	1,040	720	830	1,150	960	830	580	660	910	760	660	460	Carbon Steel Alloy Steel (30~45HRC)
130	200	160	130	90	130	200	160	130	90	130	180	150	130	90	130	180	150	130	90	
650	1,200	960	650	450	630	1,160	930	630	440	590	970	810	700	410	530	880	730	530	370	
0.1	0.12	0.12	0.1	0.1	0.1	0.12	0.12	0.1	0.1	0.1	0.12	0.12	0.12	0.1	0.1	0.12	0.12	0.1	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
1,500	2,490	1,800	1,300	1,000	1,200	2,000	1,440	1,040	800	960	1,470	1,150	830	640	760	1,170	910	660	510	Stainless Steel
150	250	180	130	100	150	250	180	130	100	150	230	180	130	100	150	230	180	130	100	
750	1,870	1,350	780	500	720	1,800	1,040	630	480	680	1,550	1,210	700	450	610	1,410	1,100	640	410	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.12	0.1	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
1,500	2,490	2,000	1,500	1,300	1,200	2,000	1,600	1,200	1,040	960	1,600	1,280	960	830	760	1,270	1,020	760	660	Cast iron
150	250	200	150	130	150	250	200	150	130	150	250	200	150	130	150	250	200	150	130	
750	2,490	2,000	1,130	650	720	2,400	1,920	1,080	630	680	2,240	1,800	1,010	590	610	2,040	1,640	920	530	
0.1	0.2	0.2	0.15	0.1	0.1	0.2	0.2	0.15	0.1	0.1	0.2	0.2	0.15	0.1	0.1	0.2	0.2	0.15	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
5,980	11,950	7,970	5,980	5,980	4,780	9,560	6,370	4,780	4,780	3,830	9,560	6,370	3,830	3,830	3,040	7,590	5,060	3,040	3,040	Aluminum alloy
600	1,200	800	600	600	600	1,200	800	600	600	600	1,500	1,000	600	600	600	1,500	1,000	600	600	
2,990	8,970	5,980	3,590	2,990	2,870	8,610	5,740	3,450	2,870	2,690	10,040	6,690	3,220	3,220	2,440	9,110	6,080	2,920	2,920	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.12	0.1	0.15	0.15	0.12	0.12	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
300	600	500	300	300	240	480	400	240	240	200	390	320	200	200	160	310	260	160	160	Titanium alloy Ti-6Al-4V (wet condition)
30	60	50	30	30	30	60	50	30	30	30	60	50	30	30	30	60	50	30	30	
150	450	380	150	150	150	440	360	150	150	140	410	340	170	140	130	380	320	160	130	
0.1	0.15	0.15	0.1	0.1	0.1	0.15	0.15	0.1	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
800	1,200	1,000	800	800	640	960	800	640	640	390	640	510	390	390	310	510	410	310	310	Hardened Steel 45~55HRC
80	120	100	80	80	80	120	100	80	80	60	100	80	60	60	60	100	80	60	60	
400	600	500	400	400	390	580	480	390	390	280	450	360	280	280	250	410	330	250	250	
0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	
500	1,000	700	500	500	400	800	560	400	400	320	510	390	320	320	260	410	310	260	260	Hardened Steel 55~62HRC
50	100	70	50	50	50	100	70	50	50	50	80	60	50	50	50	80	60	50	50	
130	350	250	130	130	120	340	240	120	120	120	250	200	120	120	110	230	180	110	110	
0.05	0.07	0.07	0.05	0.05	0.05	0.07	0.07	0.05	0.05	0.05	0.07	0.07	0.05	0.05	0.05	0.07	0.07	0.05	0.05	
0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
16~32	16~32	16~32	16~32	16	20~40	20~40	20~40	20~40	20	25~50	25~50	25~50	25~50	25	31~63	31~63	31~63	31~63	31	

Recommended Cutting Conditions

Standard cutting conditions for side finishing

Work material	Recommended grade	Tool dia. DC	φ16mm or 5/8" (2 flutes)					φ20mm or 3/4" (3 flutes)					φ25mm or 1.0" (4 flutes)				
		Overhang	<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		Modular carbide shank		
			General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC
Mild steel (200HB or less)	Z100 TH08 P420 S460	n (min-1)	7,970	15,930	11,950	7,970	7,970	6,370	12,740	9,560	6,370	6,370	5,100	10,200	7,650	5,100	5,100
		Vc (m/min)	400	800	600	400	400	400	800	600	400	400	400	800	600	400	400
		Vf (mm/min)	1,600	4,780	3,590	1,920	1,600	1,920	5,740	4,310	2,300	1,920	2,040	6,120	4,590	2,450	2,040
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Carbon steel Alloy steel (30HRC or less)	Z10 0 TH08 P420 S460	n (min-1)	5,980	11,950	7,970	7,970	5,980	4,780	9,560	6,370	6,370	4,780	3,830	7,650	5,100	5,100	3,830
		Vc (m/min)	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300
		Vf (mm/min)	1,200	3,590	2,400	1,920	1,200	1,440	4,310	2,870	2,300	1,440	1,540	4,590	3,060	2,450	1,540
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Carbon steel Alloy steel (30～45HRC)	TH08 P420 S460	n (min-1)	3,990	9,960	6,970	5,980	5,980	3,190	7,970	5,580	4,780	4,780	2,550	6,370	4,460	3,830	3,830
		Vc (m/min)	200	500	350	300	300	200	500	350	300	300	200	500	350	300	300
		Vf (mm/min)	800	2,400	1,680	1,200	960	960	2,870	2,010	1,440	1,150	1,020	3,060	2,150	1,540	1,230
		fz (mm/t)	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Stainless steel	P420 M460 TH08	n (min-1)	5,980	11,950	7,970	7,970	5,980	4,780	9,560	6,370	6,370	4,780	3,830	7,650	5,100	5,100	3,830
		Vc (m/min)	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300
		Vf (mm/min)	1,200	3,590	2,400	1,920	1,200	1,440	4,310	2,870	2,300	1,440	1,540	4,590	3,060	2,450	1,540
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Cast iron	TH08 P420 S460	n (min-1)	5,980	11,950	9,960	7,970	7,970	4,780	9,560	7,970	6,370	6,370	3,830	7,650	6,370	5,100	5,100
		Vc (m/min)	300	600	500	400	400	300	600	500	400	400	300	600	500	400	400
		Vf (mm/min)	1,200	3,590	2,990	1,920	1,600	1,440	4,310	3,590	2,300	1,920	1,540	4,590	3,830	2,450	2,040
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Aluminum alloy	D510	n (min-1)	11,950	23,890	15,930	11,950	11,950	9,560	19,110	12,740	9,560	9,560	7,650	15,290	10,200	7,650	7,650
		Vc (m/min)	600	1,200	800	600	600	600	1,200	800	600	600	600	1,200	800	600	600
		Vf (mm/min)	2,390	7,170	4,780	2,870	2,390	2,870	8,600	5,740	3,450	2,870	3,060	9,180	6,120	3,680	3,060
		fz (mm/t)	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1
		ap (mm)	2	2	2	1.5	1	2	2	2	1.5	1	2	2	2	1.5	1
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Titanium alloy Ti-6Al-4V (wet condition)	TH08 P420	n (min-1)	1,200	1,800	1,600	1,200	1,200	960	1,440	1,280	960	960	770	1,150	1,020	770	770
		Vc (m/min)	60	90	80	60	60	60	90	80	60	60	60	90	80	60	60
		Vf (mm/min)	240	440	390	240	200	290	520	470	290	240	310	560	490	310	250
		fz (mm/t)	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Hardened steel 45～55HRC	P405 TH08 P420	n (min-1)	2,990	4,980	3,590	2,990	2,990	2,390	3,990	2,870	2,390	2,390	1,920	3,190	2,300	1,920	1,920
		Vc (m/min)	150	250	180	150	150	150	250	180	150	150	150	250	180	150	150
		Vf (mm/min)	600	1,000	720	480	480	720	1,200	870	580	580	770	1,280	920	620	620
		fz (mm/t)	0.1	0.1	0.1	0.08	0.08	0.1	0.1	0.1	0.08	0.08	0.1	0.1	0.1	0.08	0.08
		ap (mm)	2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1	0.7
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Hardened steel 55～62HRC	P405 TH08 P420	n (min-1)	2,590	3,990	3,190	2,590	2,590	2,080	3,190	2,550	2,080	2,080	1,660	2,550	2,040	1,660	1,660
		Vc (m/min)	130	200	160	130	130	130	200	160	130	130	130	200	160	130	130
		Vf (mm/min)	520	800	640	420	260	630	960	770	500	320	670	1,020	820	540	340
		fz (mm/t)	0.1	0.1	0.1	0.08	0.05	0.1	0.1	0.1	0.08	0.05	0.1	0.1	0.1	0.08	0.05
		ap (mm)	1.5	1.5	1	0.7	0.5	1.5	1.5	1	0.7	0.5	1.5	1.5	1	0.7	0.5
		ae (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2



ϕ32mm or 1.25" (5 flutes)					ϕ40mm or 1.5" (6 flutes)					ϕ50mm or 2.0" (7 flutes)					ϕ63mm or 2.5" (8 flutes)					Work material
<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		3DC-5DC	5DC-7DC	>7DC	<3DC		3DC-5DC	5DC-7DC	>7DC	
General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting				General purpose	High-speed cutting				
3,990	7,970	5,980	3,990	3,990	3,190	6,370	4,780	3,190	3,190	2,550	5,100	3,830	2,550	2,550	2,030	4,050	3,040	2,030	2,030	Mild steel (200HB or less)
400	800	600	400	400	400	800	600	400	400	400	800	600	400	400	400	800	600	400	400	
2,000	5,980	4,490	2,400	2,000	1,920	5,740	4,310	2,300	1,920	1,790	5,360	4,030	2,150	1,790	1,630	4,860	3,650	1,950	1,630	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	<0.2	
2,990	5,980	3,990	3,990	2,990	2,390	4,780	3,190	3,190	2,390	1,920	3,830	2,550	2,550	1,920	1,520	3,040	2,030	2,030	1,520	Carbon steel Alloy steel (30HRC or less)
300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	
1,500	4,490	3,000	2,400	1,500	1,440	4,310	2,880	2,300	1,440	1,350	4,030	2,680	2,150	1,350	1,220	3,650	2,440	1,950	1,220	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	<0.2	
2,000	4,980	3,490	2,990	2,990	1,600	3,990	2,790	2,390	2,390	1,280	3,190	2,230	1,920	1,920	1,020	2,530	1,770	1,520	1,520	Carbon steel Alloy steel (30~45HRC)
200	500	350	300	300	200	500	350	300	300	200	500	350	300	300	200	500	350	300	300	
1,000	2,990	2,100	1,500	1,200	960	2,880	2,010	1,440	1,150	900	2,680	1,880	1,350	1,080	820	2,430	1,700	1,220	980	
0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
2,990	5,980	3,990	3,990	2,990	2,390	4,780	3,190	3,190	2,390	1,920	3,830	2,550	2,550	1,920	1,520	3,040	2,030	2,030	1,520	Stainless steel
300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	
1,500	4,490	3,000	2,400	1,500	1,440	4,310	2,880	2,300	1,440	1,350	4,030	2,680	2,150	1,350	1,220	3,650	2,440	1,950	1,220	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
2,990	5,980	4,980	3,990	3,990	2,390	4,780	3,990	3,190	3,190	1,920	3,830	3,190	2,550	2,550	1,520	3,040	2,530	2,030	2,030	Cast iron
300	600	500	400	400	300	600	500	400	400	300	600	500	400	400	300	600	500	400	400	
1,500	4,490	3,740	2,400	2,000	1,440	4,310	3,600	2,300	1,920	1,350	4,030	3,350	2,150	1,790	1,220	3,650	3,040	1,950	1,630	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
5,980	11,950	7,970	5,980	5,980	4,780	9,560	6,370	4,780	4,780	3,830	9,560	6,370	3,830	3,830	3,040	7,590	5,060	3,040	3,040	Aluminum alloy
600	1,200	800	600	600	600	1,200	800	600	600	600	1,500	1,000	600	600	600	1,500	1,000	600	600	
2,990	8,970	5,980	3,590	2,990	2,870	8,610	5,740	3,450	2,870	2,690	10,040	6,690	3,220	2,690	2,440	9,110	6,080	2,920	2,440	
0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	0.1	0.15	0.15	0.12	0.1	
2	2	2	1.5	1	2	2	2	1.5	1	2	2	2	2	1.5	2	2	2	2	1.5	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
600	900	800	600	600	480	720	640	480	480	390	580	510	390	390	310	460	410	310	310	Titanium alloy Ti-6Al-4V (wet condition)
60	90	80	60	60	60	90	80	60	60	60	90	80	60	60	60	90	80	60	60	
300	540	480	300	240	290	520	470	290	240	280	490	430	280	220	250	450	400	250	200	
0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	0.1	0.12	0.12	0.1	0.08	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	2	1.5	1	2	2	2	1.5	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
1,500	2,490	1,800	1,500	1,500	1,200	2,000	1,440	1,200	1,200	960	1,600	1,150	960	960	760	1,270	910	760	760	Hardened steel 45~55HRC
150	250	180	150	150	150	250	180	150	150	150	250	180	150	150	150	250	180	150	150	
750	1,250	900	600	600	720	1,200	870	580	580	680	1,120	810	540	540	610	1,020	730	490	490	
0.1	0.1	0.1	0.08	0.08	0.1	0.1	0.1	0.08	0.08	0.1	0.1	0.1	0.08	0.08	0.1	0.1	0.1	0.08	0.08	
2	2	1.5	1	0.7	2	2	1.5	1	0.7	2	2	1.5	1.2	1	2	2	1.5	1.2	1	
< 0.2	< 0.2	<0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	<0.2	< 0.2	
1,300	2,000	1,600	1,300	1,300	1,040	1,600	1,280	1,040	1,040	830	1,280	1,020	830	830	660	1,020	810	660	660	Hardened steel 55~62HRC
130	200	160	130	130	130	200	160	130	130	130	200	160	130	130	130	200	160	130	130	
650	1,000	800	520	330	630	960	770	500	320	590	900	720	470	300	530	820	650	370	270	
0.1	0.1	0.1	0.08	0.05	0.1	0.1	0.1	0.08	0.05	0.1	0.1	0.1	0.08	0.05	0.1	0.1	0.1	0.07	0.05	
1.5	1.5	1	0.7	0.5	1.5	1.5	1	0.7	0.5	1.5	1.5	1.5	1	0.7	1.5	1.5	1.5	1.2	1	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	

Recommended Cutting Conditions

Standard cutting conditions for vertical side finishing

Work material	Recommended grade	Tool dia. DC	φ16mm or 5/8" (2 flutes)					φ20mm or 3/4" (3 flutes)					φ25mm or 1.0" (4 flutes)				
		Overhang	<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		Modular carbide shank		
			General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC
Carbon steel Alloy steel (30HRC or less)	*TH08 Z100 P420 S460*	*n* (min^{-1})	5,980	11,950	7,970	7,970	5,980	4,780	9,560	6,370	6,370	4,780	3,830	7,650	5,100	5,100	3,830
		*v*c (m/min)	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300
		*v*f (mm/min)	1,560	4,780	2,400	2,080	1,200	1,870	5,740	2,870	2,490	1,440	2,300	6,120	3,680	3,060	1,840
		*f*z (mm/t)	0.13	0.2	0.15	0.13	0.1	0.13	0.2	0.15	0.13	0.1	0.15	0.2	0.18	0.15	0.12
		*p*f (mm)	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7
		*a*e (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Cast iron	*TH08 P420 S460*	*n* (min^{-1})	5,980	11,950	9,960	7,970	7,970	4,780	9,560	7,970	6,370	6,370	3,830	7,650	6,370	5,100	5,100
		*v*c (m/min)	300	600	500	400	400	300	600	500	400	400	300	600	500	400	400
		*v*f (mm/min)	1,800	4,780	3,990	3,190	2,400	2,160	5,740	4,790	3,830	2,870	3,070	7,650	5,100	4,080	3,060
		*f*z (mm/t)	0.15	0.2	0.2	0.2	0.15	0.15	0.2	0.2	0.2	0.15	0.2	0.25	0.2	0.2	0.15
		*p*f (mm)	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7
		*a*e (mm)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2

Standard cutting conditions for vertical roughing

Use nose corner radius *R*0.8 insert.

Work material	Recommended grade	Tool dia. DC	φ16mm or 5/8" (2 flutes)					φ20mm or 3/4" (3 flutes)					φ25mm or 1.0" (4 flutes)				
		Overhang	<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		Modular carbide shank		
			General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC
Carbon steel Alloy steel (30HRC or less)	*P420 S460*	*n* (min^{-1})	2,990	3,990	2,990	2,990	2,390	2,390	3,190	2,390	2,390	1,920	1,920	2,550	1,920	1,920	1,530
		*v*c (m/min)	150	200	150	150	120	150	200	150	150	120	150	200	150	150	120
		*v*f (mm/min)	900	1,200	720	600	340	1,080	1,440	870	720	410	1,160	1,530	930	770	430
		*f*z (mm/t)	0.15	0.15	0.12	0.1	0.07	0.15	0.15	0.12	0.1	0.07	0.15	0.15	0.12	0.1	0.07
		*p*f (mm)	3.6	3.6	3.6	3.6	3	4	4	4	4	4	4.5	4.5	4.5	4.5	4.5
		*a*e (mm)	< 4	< 4	< 3	< 2	< 2	< 4	< 4	< 3	< 2	< 2	< 4	< 4	< 3	< 2	< 2
Cast iron	*TH08 P420 S460*	*n* (min^{-1})	2,990	4,980	3,990	3,990	2,990	2,390	3,990	3,190	3,190	2,390	1,920	3,190	2,550	2,550	1,920
		*v*c (m/min)	150	250	200	200	150	150	250	200	200	150	150	250	200	200	150
		*v*f (mm/min)	1,200	2,000	1,200	1,040	600	1,440	2,400	1,440	1,250	720	1,540	2,560	1,530	1,330	770
		*f*z (mm/t)	0.2	0.2	0.15	0.13	0.1	0.2	0.2	0.15	0.13	0.1	0.2	0.2	0.15	0.13	0.1
		*p*f (mm)	3.6	3.6	3.6	3.6	3.6	4	4	4	4	4	4.5	4.5	4.5	4.5	4.5
		*a*e (mm)	< 4	< 4	< 4	< 4	< 3	< 4	< 4	< 4	< 4	< 3	< 4	< 4	< 4	< 4	< 3



ϕ32mm or 1.25" (5 flutes)					ϕ40mm or 1.5" (6 flutes)					ϕ50mm or 2.0" (7 flutes)					ϕ63mm or 2.5" (8 flutes)					Work material
＜3DC		Modular carbide shank			＜3DC		Modular carbide shank			＜3DC		3DC-5DC	5DC-7DC	>7DC	＜3DC		3DC-5DC	5DC-7DC	>7DC	
General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting				General purpose	High-speed cutting				
2,990	5,980	3,990	3,990	2,990	2,390	4,780	3,190	3,190	2,390	1,920	3,830	2,550	2,550	1,920	1,520	3,040	2,030	2,030	1,520	Carbon steel Alloy steel (30HRC or less)
300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	300	600	400	400	300	
2,250	5,980	3,600	3,000	1,800	2,160	5,740	3,450	2,880	1,730	2,020	5,370	3,220	2,680	1,750	1,830	4,870	2,930	2,440	1,590	
0.15	0.2	0.18	0.15	0.12	0.15	0.2	0.18	0.15	0.12	0.15	0.2	0.18	0.15	0.13	0.15	0.2	0.18	0.15	0.13	
0.8	0.8	0.8	0.8	0.8	0.88	0.88	0.88	0.88	0.88	1	1	1	1	1	1.12	1.12	1.12	1.12	1.12	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	
2,990	5,980	4,980	3,990	3,990	2,390	4,780	3,990	3,190	3,190	1,920	3,830	3,190	2,550	2,550	1,520	3,040	2,530	2,030	2,030	Cast iron
300	600	500	400	400	300	600	500	400	400	300	600	500	400	400	300	600	500	400	400	
2,990	7,480	4,980	3,990	3,000	2,870	7,170	4,790	3,830	2,880	2,690	6,710	4,920	3,570	3,220	2,440	6,080	4,460	3,250	2,930	
0.2	0.25	0.2	0.2	0.15	0.2	0.25	0.2	0.2	0.15	0.2	0.25	0.22	0.2	0.18	0.2	0.25	0.22	0.2	0.18	
0.8	0.8	0.8	0.8	0.8	0.88	0.88	0.88	0.88	0.88	1	1	1	1	1	1.12	1.12	1.12	1.12	1.12	
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	<0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	



ϕ32mm or 1.25" (5 flutes)					ϕ40mm or 1.5" (6 flutes)					ϕ50mm or 2.0" (7 flutes)					ϕ63mm or 2.5" (8 flutes)					Work material
＜3DC		Modular carbide shank			＜3DC		Modular carbide shank			＜3DC		3DC-5DC	5DC-7DC	>7DC	＜3DC		3DC-5DC	5DC-7DC	>7DC	
General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting				General purpose	High-speed cutting				
1,500	2,000	1,500	1,500	1,200	1,200	1,600	1,200	1,200	960	960	1,280	960	960	770	760	1,020	760	760	610	Carbon steel Alloy steel (30HRC or less)
150	200	150	150	120	150	200	150	150	120	150	200	150	150	120	150	200	150	150	120	
1,130	1,500	900	750	420	1,080	1,440	870	720	410	1,010	1,350	810	680	380	920	1,230	730	610	350	
0.15	0.15	0.12	0.1	0.07	0.15	0.15	0.12	0.1	0.07	0.15	0.15	0.12	0.1	0.07	0.15	0.15	0.12	0.1	0.07	
5	5	5	5	5	5.7	5.7	5.7	5.7	5.7	6.3	6.3	6.3	6.3	6.3	7.1	7.1	7.1	7.1	7.1	
< 4	< 4	< 3	< 2	< 2	< 4	< 4	< 3	< 2	< 2	< 4	< 4	< 3	< 2	< 2	< 4	< 4	< 3	< 2	< 2	
1,500	2,490	2,000	2,000	1,500	1,200	2,000	1,600	1,600	1,200	960	1,600	1,280	1,280	960	760	1,270	1,020	1,020	760	Cast iron
150	250	200	200	150	150	250	200	200	150	150	250	200	200	150	150	250	200	200	150	
1,500	3,120	2,000	2,000	1,130	1,440	3,000	1,920	1,920	1,080	1,350	2,800	1,800	1,800	1,010	1,220	2,540	1,640	1,640	920	
0.2	0.25	0.2	0.2	0.15	0.2	0.25	0.2	0.2	0.15	0.2	0.25	0.2	0.2	0.15	0.2	0.25	0.2	0.2	0.15	
5	5	5	5	5	5.7	5.7	5.7	5.7	5.7	6.3	6.3	6.3	6.3	6.3	7.1	7.1	7.1	7.1	7.1	
< 4	< 4	< 4	< 4	< 3	< 4	< 4	< 4	< 4	< 3	< 4	< 4	< 4	< 4	< 3	< 4	< 4	< 4	< 4	< 3	

Recommended Cutting Conditions

Standard cutting conditions for contour roughing

Use nose corner radius *R*2 insert.

Work material	Recommended grade	Tool dia. DC	ϕ16mm or 5/8" (2 flutes)					ϕ20mm or 3/4" (3 flutes)					ϕ25mm or 1.0" (4 flutes)				
			<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC		Modular carbide shank		
		Overhang	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC
Carbon steel Alloy steel (30HRC or less)	*P420* *S460*	*n* (min⁻¹)	2,590	3,990	2,590	2,590	1,800	2,080	3,190	2,080	2,080	1,440	1,660	2,550	1,660	1,660	1,150
		*v*c (m/min)	130	200	130	130	90	130	200	130	130	90	130	200	130	130	90
		*v*f (mm/min)	2,590	3,990	2,590	2,590	1,800	3,120	4,790	3,120	3,120	2,160	3,320	5,100	3,320	3,320	2,300
		*f*z (mm/t)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		*a*p (mm)	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25
		*a*e (mm)	13	13	13	13	13	16	16	16	16	16	20	20	20	20	20
Carbon steel Alloy steel (30～45HRC)	*P420* *S460*	*n* (min⁻¹)	1,800	3,590	2,590	2,590	1,800	1,440	2,870	2,080	2,080	1,440	1,150	2,300	1,660	1,660	1,150
		*v*c (m/min)	90	180	130	130	90	90	180	130	130	90	90	180	130	130	90
		*v*f (mm/min)	1,440	2,880	2,080	2,080	1,440	1,730	3,450	2,500	2,500	1,730	1,840	3,680	2,660	2,660	1,840
		*f*z (mm/t)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
		*a*p (mm)	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25
		*a*e (mm)	13	13	13	13	13	16	16	16	16	16	20	20	20	20	20
Stainless steel	*M460*	*n* (min⁻¹)	2,590	3,990	2,590	2,590	1,800	2,080	3,190	2,080	2,080	1,440	1,660	2,550	1,660	1,660	1,150
		*v*c (m/min)	130	200	130	130	90	130	200	130	130	90	130	200	130	130	90
		*v*f (mm/min)	2,590	3,990	2,590	2,590	1,800	3,120	4,790	3,120	3,120	2,160	3,320	5,100	3,320	3,320	2,300
		*f*z (mm/t)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		*a*p (mm)	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25
		*a*e (mm)	13	13	13	13	13	16	16	16	16	16	20	20	20	20	20
Cast iron	*P420* *S460*	*n* (min⁻¹)	2,990	3,990	2,590	2,590	1,800	2,390	3,190	2,080	2,080	1,440	1,920	2,550	1,660	1,660	1,150
		*v*c (m/min)	150	200	130	130	90	150	200	130	130	90	150	200	130	130	90
		*v*f (mm/min)	4,190	5,590	3,630	3,630	2,520	5,020	6,700	4,370	4,370	3,030	5,380	7,140	4,650	4,650	3,220
		*f*z (mm/t)	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
		*a*p (mm)	0.5	0.5	0.5	0.4	0.3	0.5	0.5	0.5	0.4	0.3	0.5	0.5	0.5	0.4	0.3
		*a*e (mm)	13	13	13	13	13	16	16	16	16	16	20	20	20	20	20

ϕ32mm or 1.25" (5 flutes)					ϕ40mm or 1.5" (6 flutes)					ϕ50mm or 2.0" (7 flutes)					ϕ63mm or 2.5" (8 flutes)					Work material
<3DC		Modular carbide shank			<3DC		Modular carbide shank			<3DC					<3DC					
General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	General purpose	High-speed cutting	3DC-5DC	5DC-7DC	>7DC	
1,300	2,000	1,300	1,300	900	1,040	1,600	1,040	1,040	720	830	1,280	830	830	580	660	1,020	660	660	460	Carbon steel Alloy steel (30HRC or less)
130	200	130	130	90	130	200	130	130	90	130	200	130	130	90	130	200	130	130	90	
3,250	5,000	3,250	3,250	2,250	3,120	4,800	3,120	3,120	2,160	2,910	4,480	2,910	2,910	2,030	2,640	4,080	2,640	2,640	1,840	
0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	
25	25	25	25	25	32	32	32	32	32	40	40	40	40	40	50	50	50	50	50	
900	1,800	1,300	1,300	900	720	1,440	1,040	1,040	720	830	1,280	830	830	580	460	910	660	660	460	Carbon steel Alloy steel (30～45HRC)
90	180	130	130	90	90	180	130	130	90	130	200	130	130	90	90	180	130	130	90	
1,800	3,600	2,600	2,600	1,800	1,730	3,460	2,500	2,500	1,730	2,330	3,590	2,330	2,330	1,630	1,480	2,920	2,120	2,120	1,480	
0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	
25	25	25	25	25	32	32	32	32	32	40	40	40	40	40	50	50	50	50	50	
1,300	2,000	1,300	1,300	900	1,040	1,600	1,040	1,040	720	960	1,470	1,150	830	640	660	1,020	660	660	460	Stainless steel
130	200	130	130	90	130	200	130	130	90	150	230	180	130	100	130	200	130	130	90	
3,250	5,000	3,250	3,250	2,250	3,120	4,800	3,120	3,120	2,160	3,360	5,150	4,030	2,910	2,240	2,640	4,080	2,640	2,640	1,840	
0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	0.5	0.5	0.4	0.3	0.25	
25	25	25	25	25	32	32	32	32	32	40	40	40	40	40	50	50	50	50	50	
1,500	2,000	1,300	1,300	900	1,200	1,600	1,040	1,040	720	960	1,280	830	830	580	760	1,020	660	660	460	Cast iron
150	200	130	130	90	150	200	130	130	90	150	200	130	130	90	150	200	130	130	90	
5,250	7,000	4,550	4,550	3,150	5,040	6,720	4,370	4,370	3,030	4,710	6,280	4,070	4,070	2,850	4,260	5,720	3,700	3,700	2,580	
0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
0.5	0.5	0.5	0.4	0.3	0.5	0.5	0.5	0.4	0.3	0.5	0.5	0.5	0.4	0.3	0.5	0.5	0.5	0.4	0.3	
25	25	25	25	25	32	32	32	32	32	40	40	40	40	40	50	50	50	50	50	

Recommended Cutting Conditions

Cutting conditions for cutting aluminum alloy and copper using S510



Cutting conditions for bottom finishing：a_e=0.5DC～0.7DC

Work material	Cutting conditions	ϕ16mm or 5/8" 2ft.	ϕ18mm or .71875" 2ft.	ϕ20mm or 3/4" 3ft.	ϕ22mm or 7/8" 3ft.	ϕ25mm or 1.0" 4ft.	ϕ28mm or 1.1024" 4ft.	ϕ30mm or 1.1811" 4ft.	ϕ32mm or 1.25" 5ft.	ϕ35mm or 1.3780" 5ft.	ϕ40mm or 1.5" 6ft.	ϕ50mm or 2.0" 7ft.	ϕ63mm or 2.4803" 8ft.
Expanded aluminum alloy material 5052,7075, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	15,900	15,900	15,900	15,900	15,300	13,640	12,730	11,940	10,910	9,550	7,640	6,060
	Cutting speed *Vc* (m/min)	800	900	1,000	1,100	1,200	1,200	1,200	1,200	1,200	1,200	1,200	1,200
	Feed rate *fz* (mm/t)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.08	0.08	0.08	0.06	0.06
	Feed speed *Vf* (mm/min)	3,180	3,180	4,770	4,770	6,120	5,460	5,090	4,780	4,360	4,580	3,210	2,910
	Cutting depth *ap* (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Cast aluminum alloy material 309,383.0, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	12,700	12,700	12,700	12,700	12,200	10,900	10,190	9,550	8,730	7,640	6,110	4,850
	Cutting speed *Vc* (m/min)	640	720	800	880	960	960	960	960	960	960	960	960
	Feed rate *fz* (mm/t)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.08	0.08	0.08	0.06	0.06
	Feed speed *Vf* (mm/min)	2,540	2,540	3,810	3,810	4,900	4,360	4,080	3,820	3,490	3,670	2,570	2,330
	Cutting depth *ap* (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Pure copper C11000,C10200, etc. (Wet: Water-soluble agent)	Revolution *n* (min-1)	5,970	5,300	4,770	4,340	3,820	3,410	3,180	2,980	2,730	2,390	1,910	1,520
	Cutting speed *Vc* (m/min)	300	300	300	300	300	300	300	300	300	300	300	300
	Feed rate *fz* (mm/t)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.08	0.08	0.08	0.06	0.06
	Feed speed *Vf* (mm/min)	1,190	1,060	1,430	1,300	1,530	1,360	1,270	1,190	1,090	1,150	800	730
	Cutting depth *ap* (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2



Cutting conditions for side finishing ：a_e≦0.2mm

Work material	Cutting conditions	ϕ16mm or 5/8" 2ft.	ϕ18mm or .71875" 2ft.	ϕ20mm or 3/4" 3ft.	ϕ22mm or 7/8" 3ft.	ϕ25mm or 1.0" 4ft.	ϕ28mm or 1.1024" 4ft.	ϕ30mm or 1.1811" 4ft.	ϕ32mm or 1.25" 5ft.	ϕ35mm or 1.3780" 5ft.	ϕ40mm or 1.5" 6ft.	ϕ50mm or 2.0" 7ft.	ϕ63mm or 2.4803" 8ft.
Expanded aluminum alloy material 5052,7075, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	15,900	15,900	15,900	15,900	15,300	13,640	12,730	11,940	10,910	9,550	7,640	6,060
	Cutting speed *Vc* (m/min)	800	900	1,000	1,100	1,200	1,200	1,200	1,200	1,200	1,200	1,200	1,200
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.18	0.2	0.2
	Feed speed *Vf* (mm/min)	4,770	4,770	7,160	7,160	9,180	8,180	7,640	8,960	8,180	10,300	10,700	9,700
	Cutting depth *ap* (mm)	2	2	2	2	2	2	2	2	2	2	2	2
Cast aluminum alloy material 309,383.0, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	12,700	12,700	12,700	12,700	12,200	10,900	10,190	9,550	8,730	7,640	6,110	4,850
	Cutting speed *Vc* (m/min)	640	720	800	880	960	960	960	960	960	960	960	960
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.18	0.2	0.2
	Feed speed *Vf* (mm/min)	3,810	3,810	5,720	5,720	7,320	6,540	6,100	7,160	6,550	8,250	8,550	7,760
	Cutting depth *ap* (mm)	2	2	2	2	2	2	2	2	2	2	2	2
Pure copper C11000,C10200, etc. (Wet: Water-soluble agent)	Revolution *n* (min-1)	5,970	5,300	4,770	4,340	3,820	3,410	3,180	2,980	2,730	2,390	1,910	1,520
	Cutting speed *Vc* (m/min)	300	300	300	300	300	300	300	300	300	300	300	300
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.2	0.2	0.25	0.25
	Feed speed *Vf* (mm/min)	1,790	1,590	2,150	1,950	2,290	2,050	1,910	2,240	2,730	2,870	3,340	3,040
	Cutting depth *ap* (mm)	2	2	2	2	2	2	2	2	2	2	2	2

Cutting conditions for vertical roughing



Work material	Cutting conditions	ϕ16mm or 5/8" 2ft.	ϕ18mm or .71875" 2ft.	ϕ20mm or 3/4" 3ft.	ϕ22mm or 7/8" 3ft.	ϕ25mm or 1.0" 4ft.	ϕ28mm or 1.1024" 4ft.	ϕ30mm or 1.1811" 4ft.	ϕ32mm or 1.25" 5ft.	ϕ35mm or 1.3780" 5ft.	ϕ40mm or 1.5" 6ft.	ϕ50mm or 2.0" 7ft.	ϕ63mm or 2.4803" 8ft.
Expanded aluminum alloy material 5052,7075, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	15,900	15,900	15,900	15,900	15,300	13,640	12,730	11,940	10,910	9,550	7,640	6,060
	Cutting speed *Vc* (m/min)	800	900	1,000	1,100	1,200	1,200	1,200	1,200	1,200	1,200	1,200	1,200
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	Feed speed *Vf* (mm/min)	4,770	4,770	7,160	7,160	9,180	8,180	7,640	8,960	8,180	8,600	8,020	7,270
	Pick feed *pf* (mm)	3.5	4	4	4	4.5	4.5	5	5	5.5	6	6.5	7
	Cutting width *ae* (mm)	4	4	4	4	4	4	4	4	4	4	4	4
Cast aluminum alloy material 309,383.0, etc. (Air-blow or wet: Water-soluble agent)	Revolution *n* (min-1)	12,700	12,700	12,700	12,700	12,200	10,900	10,190	9,550	8,730	7,640	6,110	4,850
	Cutting speed *Vc* (m/min)	640	720	800	880	960	960	960	960	960	960	960	960
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	Feed speed *Vf* (mm/min)	3,810	3,810	5,720	5,720	7,320	6,540	6,100	7,160	6,550	6,880	6,420	5,820
	Pick feed *pf* (mm)	3.5	4	4	4	4.5	4.5	5	5	5.5	6	6.5	7
	Cutting width *ae* (mm)	4	4	4	4	4	4	4	4	4	4	4	4
Pure copper C11000,C10200, etc. (Wet: Water-soluble agent)	Revolution *n* (min-1)	5,970	5,300	4,770	4,340	3,820	3,410	3,180	2,980	2,730	2,390	1,910	1,520
	Cutting speed *Vc* (m/min)	300	300	300	300	300	300	300	300	300	300	300	300
	Feed rate *fz* (mm/t)	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	Feed speed *Vf* (mm/min)	1,790	1,590	2,150	1,950	2,290	2,050	1,910	2,240	2,050	2,150	2,000	1,820
	Pick feed *pf* (mm)	3.5	4	4	4	4.5	4.5	5	5	5.5	6	6.5	7
	Cutting width *ae* (mm)	4	4	4	4	4	4	4	4	4	4	4	4

Cutting by direct milling is also possible.

Since the cutting flute do not extend to the center, there are limitations on the ramp angle and hole diameter, but as shown right, cutting by direct milling without a pilot hole is possible for ramping and helical milling.



Ramping



Helical milling

RAMPING/HELICAL MILLING - METRIC DIAMETER

Inserts	*MPGX* **0603** **RL**											
Tool dia. DC (mm)	**ϕ16**	**ϕ18**	**ϕ20**	**ϕ22**	**ϕ25**	**ϕ28**	**ϕ30**	**ϕ32**	**ϕ35**	**ϕ40**	**ϕ50**	**ϕ63**
Recommended *θ*	2.5°	2.5°	2.5°	2.5°	2.1°	1.8°	1.7°	1.6°	1.4°	1.2°	1.0°	0.5°
Hole Dia. (mm)	22~30	26~34	30~38	34~42	40~48	46~54	50~58	54~62	60~68	70~78	90~98	116~124